

# UM680

Industrial-Grade Multi-GNSS  
Dual-Frequency High-Precision RTK  
Positioning Module



17.0 x 22.0 x 2.6 mm



## Applications



Industrial  
Applications

## Ordering Information

Supply at multiples of 250 pieces

## Physical Specifications

Dimensions	17.0 x 22.0 x 2.6 mm
Package	54 pin, LGA
Operating Temperature	-40°C ~ +85 °C/105 °C
Storage Temperature	-40°C ~ +85 °C/105 °C

## Electrical Specifications

Voltage	2.7 V ~ 3.6 V DC
LNA	2.7 V ~ 3.3 V, < 100 mA
Power Consumption <sup>1</sup>	240 mW

## Interfaces

2 x UART (LVTTTL)
1 x I <sup>2</sup> C*
1 x SPI*
1 x 1PPS (LVTTTL)

## Functional Characteristics


Passive Antenna, Active Antenna, AGNSS \*

**Note:** \* Supported by specific firmware.  
1 Open sky, continuous tracking  
2 68% at 30 m/s for dynamic operation, open sky

## Features

- » Supports concurrent operation of GPS, BDS, GLONASS and Galileo (L1 + L5)
- » Supports A-GNSS to reduce the TTFF
- » Production process conforms to IATF16949
- » Anti-jamming design to ensure the module working stably in complex electromagnetic environment
- » Centimeter-level positioning accuracy & raw data output

UM680 is a high-precision GNSS RTK positioning and navigation module developed by Unicore for industrial applications. It is designed based on the proprietary multi-system, dual-frequency, high-performance GNSS SoC - UC6580I, and the production process complies with IATF16949. UM680 supports L1+L5 dual frequencies of GPS, BDS, GLONASS\*, Galileo, QZSS, and NavIC\*, enabling multi-system dual-frequency joint positioning or single-system standalone positioning.

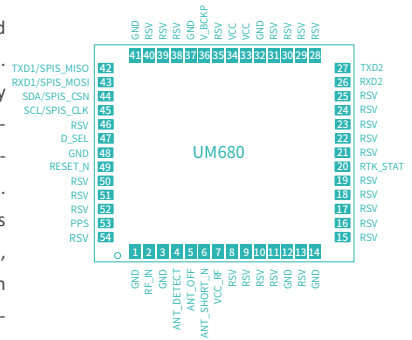

## Performance Specifications

Channel	96 channels, based on UFirebird II GPS L1C/A, L5 BDS B1I, B1C*, B2a GLONASS G1* Galileo E1, E5a QZSS L1, L5 NavIC L5* SBAS L1C/A
Frequency	Single-system standalone positioning Multi-system joint positioning
Modes	Single-system standalone positioning Multi-system joint positioning
Time to First Fix (TTFF)	Cold Start: < 26 s Hot Start: < 2 s Reacquisition: < 2 s
Single Point Positioning(RMS)	Horizontal: 1.5 m (open sky) Vertical: 2.5 m (open sky)
RTK (RMS)	Horizontal: 1 cm + 1 ppm (open sky) Vertical: 2 cm + 1 ppm (open sky)
Velocity Accuracy(RMS) <sup>2</sup>	0.05m/s (open sky)
1PPS	20 ns GNSS Tracking -162 dBm
Sensitivity	Cold Start -147 dBm Hot Start -157 dBm Reacquisition -158 dBm
Data Update Rate	1 Hz / 5 Hz / 10 Hz
Correction	RTCM V3.V
Data Format	NMEA 0183, Unicore